Global Water Sp. z o.o.
ul. Daleka 7, 41-253 Czeladź
e-mail: sklep@osmoza.pl, www.sklep.osmoza.pl
tel. 32 360 25 43, kom. 503 177 946

Dane aktualne na dzień: 20-04-2024 12:34

Link do produktu: https://sklep.osmoza.pl/membrana-osmotyczna-2521-do-wody-slonej-p-1943.html

Membrana osmotyczna 2521 do wody słonej

Cena (z VAT)	**1 200,00 zł**
Dostępność	**W sprzedaży**
Czas wysyłki	**2 dni robocze**
Producent	**Global Water**

Opis produktu

Membrana osmotyczna przeznaczona do wody o dużym zasoleniu.
Membrana wymaga 15 min płukania przed pierwszym pobraniem wody.

Model	Active Membrane Area ft²(m²)	Average Permeate GPD(m³/d)	Stable Rejection Rate %	Min. Rejection Rate %
SW2521	12（1.1）	270（1.0）	99.5	99.3

Testing Conditions	Testing Pressure	800 psi (5.5Mpa)
	Testing Solution Temperature	25 ℃
	Concentration of Testing Solution (NaCl)	32800ppm
	pH value of Testing Solution	7.5
	Recovery Rate of Single Element	4%
Operation Limits & Conditions	Max. Working Pressure	1200psi（8.3Mpa）
	Max. Volume of Feed water	6gpm（1.4 m³/h）
	Max. Temperature of Feed water	45℃
	Max. Feed water SDI_{15}	5
	pH Range of Feed Water during Continuous Operation	3～10
	pH Range of Feed Water during Chemical Cleaning	1～13
	Residual Chlorine Concentration of Feed Water	<0.1ppm
	Max. Pressure Drop of Single Membrane Element	10psi（0.07Mpa）
	Max. Pressure Drop of Single Pressure Vessel with Six RO Membranes	50psi（0.34Mpa）

Global Water Sp. z o.o.
ul. Daleka 7, 41-253 Czeladź
e-mail: sklep@osmoza.pl, www.sklep.osmoza.pl
tel. 32 360 25 43, kom. 503 177 946

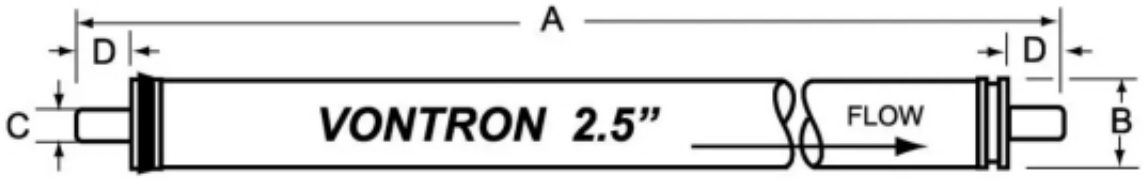

2540: A=1016.0mm (40”) B=61.0mm (2.4”) C=19.1mm (0.75”) D=30.2mm (1.19”)
2521: A=533.4mm (21”) B=61.0mm (2.4”) C=19.1mm (0.75”) D=30.2mm (1.19”)